



CROSS POINT

NEXUS AM Deactivator



Cross Point AM Deactivators are combined label detectors and label deactivators, designed for reliable detection and deactivation of AM Labels.

The NEXUS AM Deactivator counts successful and failed deactivations, so that the label quality is checked constantly.

Deactivation occurs automatically after a label is presented, but can also be enabled by the POS system or through a switch.

Review of the time-stamped deactivation history makes it possible to detect deactivation behaviour and internal fraud.

When connected to Cross Point's Integrated Loss Prevention Platform, called CrossCONNECT, reports can be sent to your mailbox and information can be integrated flexibly into existing management information systems.

Remote maintenance guarantees optimum operation at minimum cost.

Unique features


Cash register and footswitch controlled deactivation

Time stamped deactivation history

Distinction between successful and failed deactivations

Automatic synchronization with NEXUS AM systems

CrossCONNECT enabled

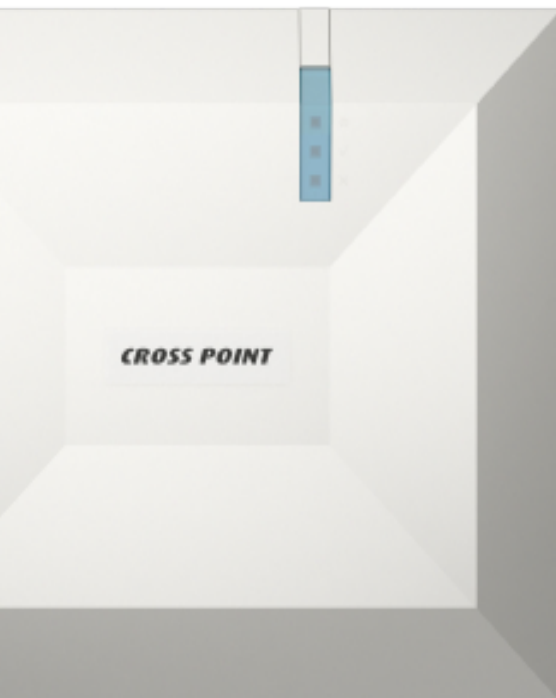

**CROSS POINT**

NEXUS AM Deactivator

Features

	NEXUS AM Deactivator
Detection before deactivation	●
Adjustable detection distance	●
Distinction between successful and failed deactivations with LED indication ¹	●
Count deactivations with time stamp and history	●
Cash register or footswitch controlled deactivation using an input	●
Selectable buzzer volume & melody	●
Synchronization with NEXUS AM systems	●
CrossCONNECT enabled for remote service and management information ¹	●
Integrated power supply	●
Recessed mounting	●
Antenna can be separated from the base and mounted elsewhere under POS	○

Mounting methods



Detection distance

Detection of DR label ²	up to 18 cm
Deactivation of DR label ²	up to 18 cm

Specifications

Controller box (L / H / D mm)	235 / 195 / 54
Antenna plate (L / H / D mm)	280 / 240 / 16
Weight (kg)	1.8
Mains	115 VAC or 230 VAC
Power over field bus	-
Input / Relays (NO, NC, COM)	1 / 1

● standard available

○ optional

- not available

¹ In combination with the CrossCONNECT Access Point² Fully coupled and depending on label quality and environment